

AD




Type
Polyurethane

Designation
SEALPUR 93

Hardness
93 °ShA

FIELD OF APPLICATION


Pressure
≤ 400 bar



Speed
≤ 0.5 m/s



Temperature
-40°C ÷ +100°C



Fluids

Hydraulic oils (mineral oil based)
For other fluids contact our technical department

SURFACE ROUGHNESS

Dynamic surface
Static surface

Ra ≤ 0.3 µm
Ra ≤ 1.6 µm

Rt ≤ 2.5 µm
Rt ≤ 6.3 µm

GAP DIMENSION "g"

The largest gap dimension appearing in operation on the non-pressurised side:

100 bar	0.80 mm	300 bar	0.30 mm
200 bar	0.45 mm	400 bar	0.20 mm

LEAD-IN CHAMFERS

d	Smin
less 100	5 mm
100÷200	7 mm
over 200	10 mm

To avoid damaging the sealing lips during installation, housing must have rounded chamfers. Sharp edges and burrs within the installation area of the seal must be removed.

The above data are maximum values, they may be maintained for short periods and can not be used at the same time simultaneously.

The rod seal type Aston Seals AD assures a good reaction against shock pressure peaks and low friction in the low pressure range.

The asymmetric lips are designed to differentiate the behaviour of the lips on the static and dynamic surfaces: the static lip is flexible and more sensitive to pressure fluctuations; the dynamic lip is shorter and stronger to concentrate load against the dynamic surface.


Wear and dry run are largely prevented by additional lubricant retained within the gap created by the secondary lip.

The material used to produce this seal is a polyurethane compound that ensures

excellent properties on wear-resistance, extended service life and resistance against extrusion.

- Extended service life
- High resistance against extrusion
- Excellent wear-resistance
- Good temperature resistance
- Insensitive to structural deflections
- Easy installation without expensive auxiliaries


AD

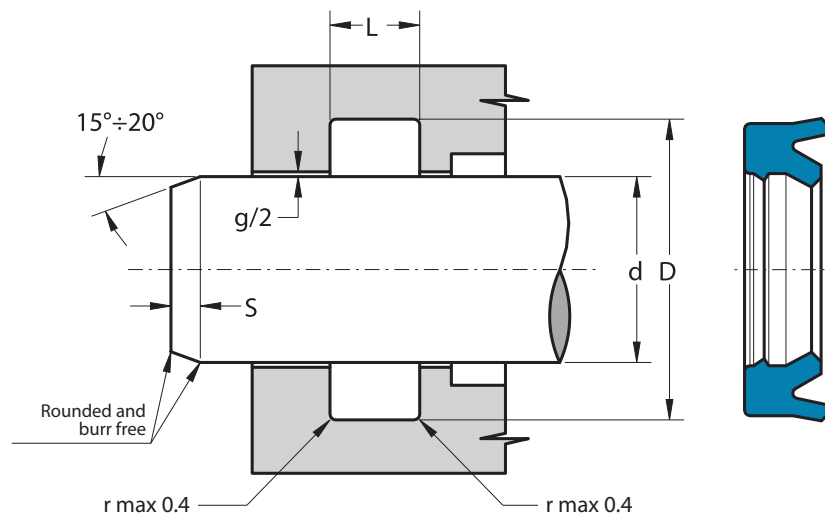

Part.	d ^{f7}	D ^{H10}	L ^{+0.25}
AD 5 10 3.5	5	10.0	4.0
AD 6 11 3.5	6	11.0	4.0
AD 7 12 4	7	12.0	4.5
AD 12 22 8	12	22.0	9.0
AD 16 24 5.8	16	24.0	6.3
AD 16 24 6	16	24.0	7.0
AD 20 25 4.1	20	25.0	5.0
AD 20 26 5	20	26.0	5.5
AD 20 28 5.7	20	28.0	6.2
AD 20 28 6	20	28.0	7.0
AD 22 28 4.5	22	28.0	5.0
AD 22 28 5.8	22	28.0	6.3
AD 22 30 5.8	22	30.0	6.3
AD 22 30 6	22	30.0	7.0
AD 22 32 7	22	32.0	8.0
AD 25 33 5.5	25	33.0	6.0
AD 25 33 5.8	25	33.0	6.3
AD 25 33 6.5	25	33.0	7.5
AD 25 35 7	25	35.0	8.0
AD 26 36 10	26	36.0	11.0
AD 28 38 7.3	28	38.0	8.3
AD 28 38.7 3.7	28	38.7	4.2
AD 30 38 5.8	30	38.0	6.3
AD 30 40 6	30	40.0	7.0

Part.	d ^{f7}	D ^{H10}	L ^{+0.25}
AD 30 40 7	30	40.0	8.0
AD 30 40 7.3	30	40.0	8.3
AD 30 40 10	30	40.0	11.0
AD 30 40.7 3.7	30	40.7	4.2
AD 30 42 11	30	42.0	12.0
AD 32 40 6	32	40.0	7.0
AD 32 40 6.5	32	40.0	7.5
AD 32 41.53 7.9	32	41.53	8.9
AD 32 42 7.3	32	42.0	8.3
AD 32 45 10	32	45.0	11.0
AD 35 43 7	35	43.0	8.0
AD 35 44.5 7.8	35	44.5	8.8
AD 35 45 7.2	35	45.0	8.2
AD 35 45.7 3.7	35	45.7	4.2
AD 36 43 6	36	43.0	7.0
AD 36 44 6	36	44.0	7.0
AD 36 46 7	36	46.0	8.0
AD 36 46 10	36	46.0	11.0
AD 38 48 8	38	48.0	9.0
AD 38 48 10	38	48.0	11.0
AD 40 48 5.8	40	48.0	6.3
AD 40 49.52 9.5	40	49.52	10.5
AD 40 50 6	40	50.0	7.0
AD 40 50 7	40	50.0	8.0

Part.	d ^{f7}	D ^{H10}	L ^{+0.25}
AD 40 50 8	40	50.0	9.0
AD 40 50 9	40	50.0	10.0
AD 40 50 10	40	50.0	11.0
AD 40 52 11	40	52.0	12.0
AD 40 55 10	40	55.0	11.0
AD 40 55.1 5.8	40	55.1	6.3
AD 42 50 5.8	42	50.0	6.3
AD 45 53 5.8	45	53.0	6.3
AD 45 55 6	45	55.0	7.0
AD 45 55 7	45	55.0	8.0
AD 45 55 10	45	55.0	11.0
AD 45 60 11.5	45	60.0	12.5
AD 45 60.1 5.8	45	60.1	6.3
AD 50 57 9	50	57.0	10.0
AD 50 57 10	50	57.0	11.0
AD 50 59.6 5.8	50	59.6	6.3
AD 50 60 7	50	60.0	8.0
AD 50 60 10	50	60.0	11.0
AD 50 63 9	50	63.0	10.0
AD 50 65 10	50	65.0	11.0
AD 50 65.1 5.8	50	65.1	6.3
AD 55 62.5 9	55	62.5	10.0
AD 55 63 11.5	55	63.0	12.5
AD 55 63.15 13	55	63.15	14.0

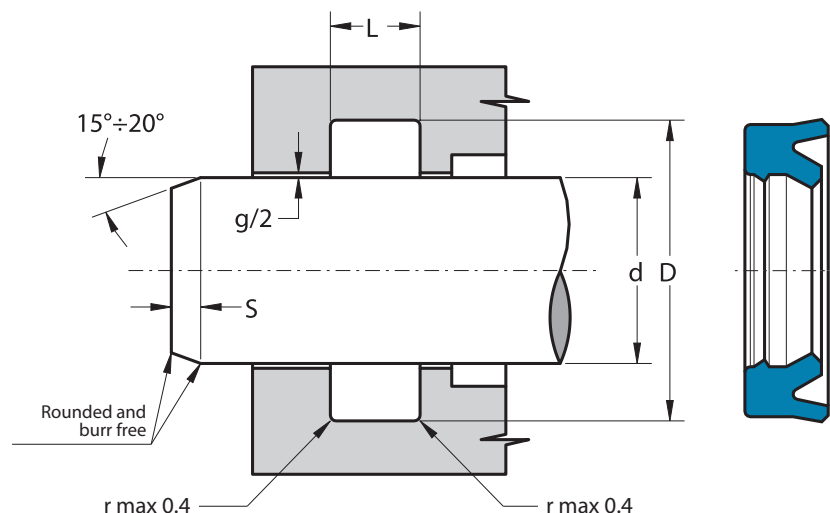


Part.	d ^{f7}	D ^{H10}	L ^{+0.25}
AD 55 65 8.5	55	65.0	9.5
AD 55 65 10	55	65.0	11.0
AD 56 71 8.5	56	71.0	9.5
AD 56 71 11.5	56	71.0	12.5
AD 60 68 8	60	68.0	9.0
AD 60 69.3 5.5	60	69.3	6.2
AD 60 70 7	60	70.0	8.0
AD 60 70 14	60	70.0	15.0
AD 60 75 12	60	75.0	13.0
AD 63 73 6	63	73.0	7.0
AD 63 73 12	63	73.0	13.0
AD 63 78 10	63	78.0	11.0
AD 63 78 11.5	63	78.0	12.5
AD 65 73 9	65	73.0	10.0
AD 65 73 11.5	65	73.0	12.5
AD 65 75 6	65	75.0	7.0
AD 65 77 9	65	77.0	10.0
AD 65 77.75 8	65	77.75	9.0
AD 65 80 12	65	80.0	13.0
AD 70 80 11.5	70	80.0	12.5
AD 70 80 12	70	80.0	13.0
AD 70 85 11.5	70	85.0	12.5
AD 75 83 11.5	75	83.0	12.5
AD 75 85 11.5	75	85.0	12.5

Part.	d ^{f7}	D ^{H10}	L ^{+0.25}
AD 78 86.15 13	78	86.15	14.0
AD 78 88 14	78	88.0	15.0
AD 80 90 7	80	90.0	8.0
AD 80 90 8	80	90.0	9.0
AD 80 95 11.5	80	95.0	12.5
AD 80 100 12	80	100.0	13.0
AD 85 93 10	85	93.0	11.0
AD 85 93 11.5	85	93.0	12.5
AD 88.9 101.6 9.5	88.9	101.6	10.5
AD 90 98 11.5	90	98.0	12.5
AD 90 100 11.5	90	100.0	12.5
AD 90 102 7.3	90	102.0	8.3
AD 90 105 11.5	90	105.0	12.5
AD 90 110 14	90	110.0	15.0
AD 95 103 11.5	95	103.0	12.5
AD 99 109 14	99	109.0	15.0
AD 100 110 10	100	110.0	11.0
AD 100 110 11.5	100	110.0	12.5
AD 100 115 12	100	115.0	13.0
AD 100 120 12	100	120.0	13.0
AD 100 120 15	100	120.0	16.0
AD 105 113 11.5	105	113.0	12.5
AD 105 113.15 13	105	113.15	14.0
AD 105 115 11.5	105	115.0	12.5

Part.	d ^{f7}	D ^{H10}	L ^{+0.25}
AD 105 120 10	105	120.0	11.0
AD 110 120 10.5	110	120.0	11.5
AD 110 130 15	110	130.0	16.0
AD 115 123 11.5	115	123.0	12.5
AD 115 125 12	115	125.0	13.0
AD 118 133 9.8	118	133.0	10.8
AD 120 130 14	120	130.0	15.0
AD 120 140 15	120	140.0	16.0
AD 125 133 11.5	125	133.0	12.5
AD 125 135 11	125	135.0	12.0
AD 125 145 15	125	145.0	16.0
AD 135 143 11.5	135	143.0	12.5
AD 135 150 11.5	135	150.0	12.5
AD 141 151 14	141	151.0	15.0
AD 145 160 12	145	160.0	13.0
AD 150 160 11	150	160.0	12.0
AD 155 163 11.5	155	163.0	12.5
AD 160 170 11.5	160	170.0	12.5
AD 162 172 14	162	172.0	15.0
AD 175 185 11	175	185.0	12.0
AD 180 190 10	180	190.0	11.0
AD 183 193 14	183	193.0	15.0
AD 207 217 14	207	217.0	15.0

AD

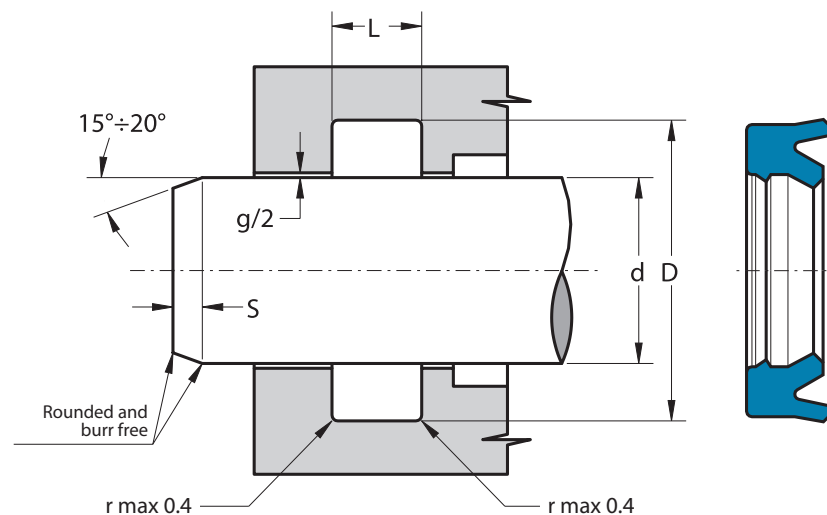

Part.	d ^{f7}	D ^{H10}	L ^{+0.25}
-------	-----------------	------------------	--------------------

Inch sizes

AD 0875 1125 0250	22.22	28.57	7.0
AD 1000 1250 0250	25.4	31.75	7.0
AD 1250 1625 0312	31.75	41.28	8.89
AD 1250 1750 0250	31.75	44.45	7.0
AD 1500 1875 0312	38.1	47.62	8.9
AD 1500 1875 0375	38.1	47.62	10.5
AD 1500 2000 0335	38.1	50.8	9.5
AD 1500 2000 0375	38.1	50.8	10.5
AD 2000 2375 0315	50.8	60.32	9.0
AD 2000 2500 0375	50.8	63.5	10.5
AD 2500 3000 0375	63.5	76.2	10.52
AD 3000 3625 0500	76.2	92.07	12.7
AD 3500 4250 0620	88.9	107.95	16.75