

S



Thanks to its semicompact profile, the rod seal type Aston Seals S assures a good sealing performance as well as at low pressure.

It's designed to be less sensitive to pressure fluctuations than typical "U" seals.

The material used to produce this seal is a polyurethane compound that ensures excellent properties on wear-resistance, extended service life and resistance against extrusion.

- Good sealing performance as well as at low pressure
- Extended service life
- Excellent wear-resistance

- Good temperature resistance
- Insensitive to pressure fluctuation
- Easy installation without expensive auxiliaries

MATERIAL


Type
Polyurethane

Designation
SEALPUR 93

Hardness
93 °ShA

FIELD OF APPLICATION


Pressure
≤ 400 bar



Speed
≤ 0.5 m/s



Temperature
-40°C ÷ +100°C



Fluids

Hydraulic oils (mineral oil based)
For other fluids contact our technical department

SURFACE ROUGHNESS

Dynamic surface
Static surface

Ra ≤ 0.3 μm Rt ≤ 2.5 μm
Ra ≤ 1.6 μm Rt ≤ 6.3 μm

GAP DIMENSION "g"

The largest gap dimension appearing in operation on the non-pressurised side:


100 bar	0.80 mm	300 bar	0.30 mm
200 bar	0.45 mm	400 bar	0.20 mm

LEAD-IN CHAMFERS

d	Smin
less 100	5 mm
100÷200	7 mm
over 200	10 mm

To avoid damaging the sealing lips during installation, housing must have rounded chamfers. Sharp edges and burrs within the installation area of the seal must be removed.

The above data are maximum values, they may be maintained for short periods and can not be used at the same time simultaneously.

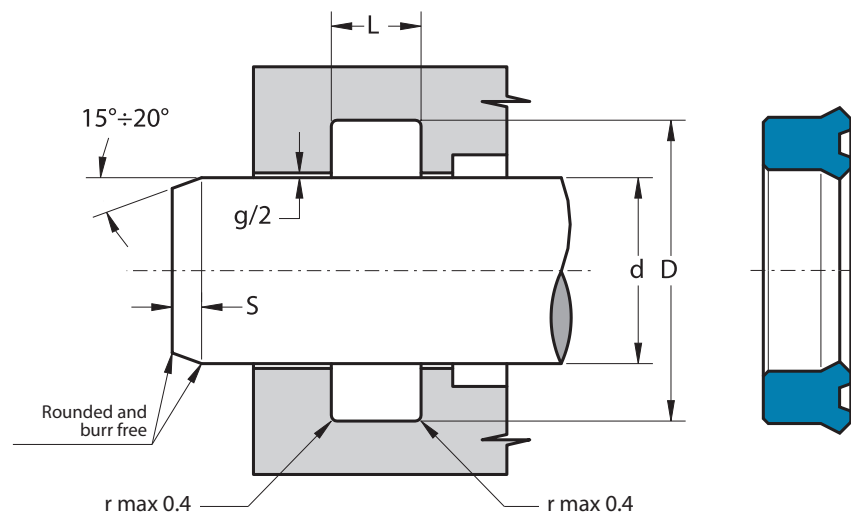

Part.	d ^{f7}	D ^{H10}	L ^{+0.25}
S 8 13 4	8	13.0	4.5
S 11 16 3.5	11	16.0	4.0
S 12 16 3.5	12	16.0	4.0
S 12 17 3.5	12	17.0	4.0
S 12 18 4.5	12	18.0	5.0
S 14 19 4.8	14	19.0	5.3
S 16 20 3.3	16	20.0	3.8
S 16 22 4	16	22.0	4.5
S 20 25 3.7	20	25.0	4.5
S 22 28 4.5	22	28.0	5.0
S 22 30 5.8	22	30.0	6.3
S 22 32 8	22	32.0	9.0
S 25 32 4	25	32.0	5.0
S 25 33 5.8	25	33.0	6.3
S 28 35 4	28	35.0	4.5
S 35 42 4.5	35	42.0	5.0
S 56 66 6.5	56	66.0	7.5
S 140 155.5 5.8	140	155.5	6.3

Inch sizes

S 3375 4375 0550	85.7	111.1	15.0
-------------------------	------	-------	------